

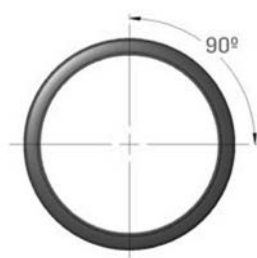


PERFORATIONS FOR SOLFLO

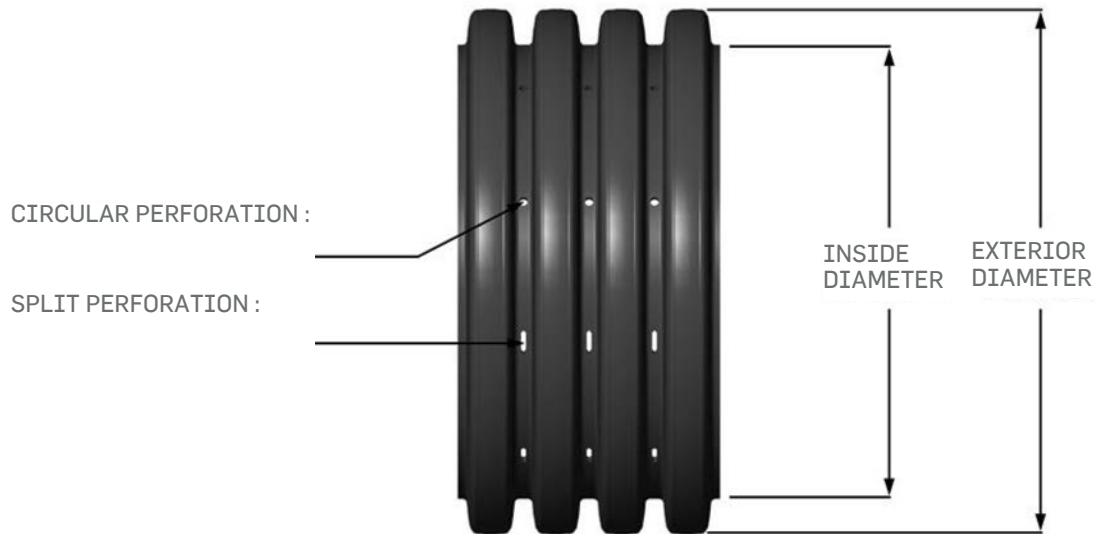

4 ROWS OF PERFORATIONS

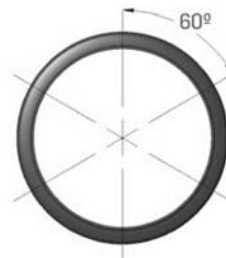

6 ROWS OF PERFORATIONS

DIA.	CORRUGATIONS		ROWS OF PERF.*	PERF./ METER	PERF./ FOOT	TYPE OF PERF. SPLIT/CIRC.
	PER METER	PER FOOT				
100 mm (4 in)	60	18	4	236	72	Split < 55 mm (2.16 in)
150 mm (6 in)	50	15	4	196	60	
200 mm (8 in)	39	12	4	152	46	
300 mm (12 in)	20	6	4	76	23	Circular < 10 mm (0.39 in)

* THE NUMBER OF ROWS CAN VARY ACCORDING TO THE FACTORY AND THE AVAILABILITY OF THE PUNCHERS.
NOTE : THE MINIMUM PERFORATED AREA MUST BE AT LEAST 32 CM²/M (1.5 IN² PER FOOT) OF LENGTH.