


FABRICATION FORM

CATCH BASIN WITH SMOOTH EXTERIOR WALL 450 mm (18 in) TO 900 mm (36 in) FOR ROADWAY* OR NON-ROADWAY USE

PROJECT : _____
 DATE REQUIRED : _____
 CLIENT : _____
 TELEPHONE : _____
 APPROVED BY : _____
 QUANTITY : _____
 CATCH BASIN NUMBER : _____ As on the site plan.

DIMENSIONS :


① Nominal diameter : _____ mm in
 Height(H) : Standard 2.0 m (6.6 ft)
 Other : _____ m ft
 Structure : Perforated Non-perforated
 With bottom Without bottom

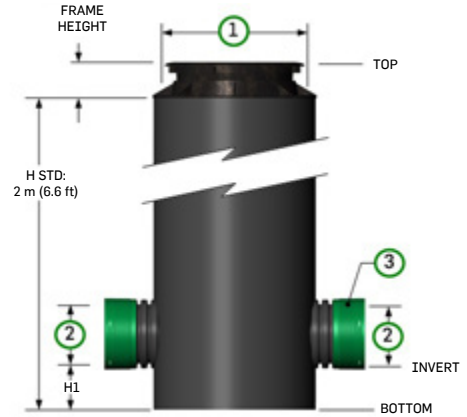

OUTLETS AND COUPLERS :

② Outlet diameter mm (in)	H1 (mm)	ANGLE (°)	③ Type of coupler	OPTIONS Hook or eyelet (for hooking system)
	Standard : 300 mm (12 in)	Top view		
A				
B				
C				
D				

OUTLET ANGLES :



FRAMES and COVERS/GRATES : None

Adjustable cast iron frame,
guide frame and grate

- 450 mm (18 in)**
- 600 mm (24 in)
- 750 mm (30 in)
- 900 mm (36 in)

**no guide frame



Roadway

Rectangular adjustable cast iron
frame, guide frame and grate

- 355.6 mm x 609.6 mm
(14 in x 24 in)
- 457.2 mm x 914.4 mm
(18 in x 36 in)



Roadway

Frame and grate in S series
cast iron

- 450 mm (18 in)
- 600 mm (24 in)
- 750 mm (30 in)
- 900 mm (36 in)



Non-roadway

OPTIONS :

Lift eyelets
(anchors not included)



COMMENTS : _____

* Note : When used with a suitable frame and grate.

APPROVAL