



SOLENO
Mastering Storm Water

TOP X
RECYFIX PRO
RECYFIX NC

Linear Collection

CIVILS

LANDSCAPING

AQUA

SPORT



TOP X

A very simple to install and efficient drainage channel. Ideal for residential applications.



TOP X®



Channel made of recycled polypropylene (PP) with self-locking grates.
 Allows linear drainage for light loads or residential application, pedestrian areas and bicycle paths.
 Available with an interior width of 90 mm (3.54 in).

STANDARDS

- Compliant to EN 1433 standard

LOW WEIGHT ENSURES EASY HANDLING ON SITE

- Made of recycled polypropylene
- Increased durability
- Very light compared to concrete channels
- Especially easy to transport and install

READY TO USE

- Channel delivered with grates locked in place
- Easy handling on site



- 1** PP channel, compliant to EN 1433 standard, with male female interlocking system.
- 2** Black PP mesh grating and galvanised steel slotted cover.
- 3**
 - 2 closed end caps
 - 4 in - 3 in adaptor
 - Collection basket
 - Drain type double bell gasket to connect with PVC pipe

AVAILABLE GRATES

	Galvanized steel slotted cover	PP mesh grating, black
Load class		
	TOP X	TOP X

TOP X, assembly of PP channels with self-locking grate

		Length	Int. width	Int. depth	Total area	Mass	Item number
A 15 	Galvanised steel slotted cover	1 m (3.28 ft)	90 mm (3.54 in)	60 mm (2.4 in)	256 cm ² (39.7 in ²)	2.0 kg (4.4 lb)	HAU44300
	PP mesh grating, 8 x 21 mm, black	1 m (3.28 ft)	90 mm (3.54 in)	60 mm (2.4 in)	509 cm ² (78.9 in ²)	1.6 kg (3.5 lb)	HAU44320

RECYFIX
line

LANDSCAPING

RECYFIX® PRO

Innovative linear drainage system
for commercial or industrial
applications with heavy traffic up to
load class C250.



RECYFIX® PRO



Channel made of recycled polypropylene (PP) with integrated reinforced angles with fitted polyamide (PA) Fibretec grates.

Allows linear drainage for light or heavy road loads.
Available with an interior width of 100 to 200 mm (4 to 8 in).

ANGLE HOUSING

- PP-angle housing
- Compliant to EN 1433 standard
- Angles to stop lateral movements

CORROSION AND UV RESISTANT GRATES

- PA (Fibretec), a high-performance material
- FIBRETEC design: innovative, functional, optimized hydraulics
- GUGI mesh grating in galvanised steel or slotted polyamide
- Approved for disabled access

READY TO USE

- Channel delivered with assembled grates locked in place
- Lightweight allowing easy handling on site

RECOGNIZED AND PROVEN DESIGN

- FIBRETEC recognized slotted design

VERY STURDY

- Excellent resistance to frost, de-icing salts and uv
- Resistant to weather conditions
- Robust and high tolerance material; pp channel body
- Suitable for climatic zones from - 50 °c up to + 80 °c and more

HIGH-GRADE MATERIALS

- RECYFIX - unbreakable and robust
- Elastic and particularly resistant material
- Excellent resistance to daily traffic stresses

ANGLED AND T-JOINTS ASSEMBLIES

- Lateral preforms for angle and T-joints
- Simplified handling


LIGHTWEIGHT FOR QUICK AND EASY INSTALLATION

- Very light material and easy to handle
- Easy to transport and install

1
PP channel, compliant with the EN 1433 standard, with reinforced and integrated angles.

2
PP grate or galvanisez steel from B 125 to C 250 load class.


3
End cap with or without outlet (optional).

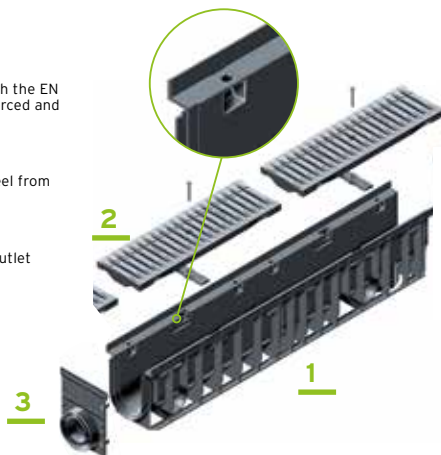







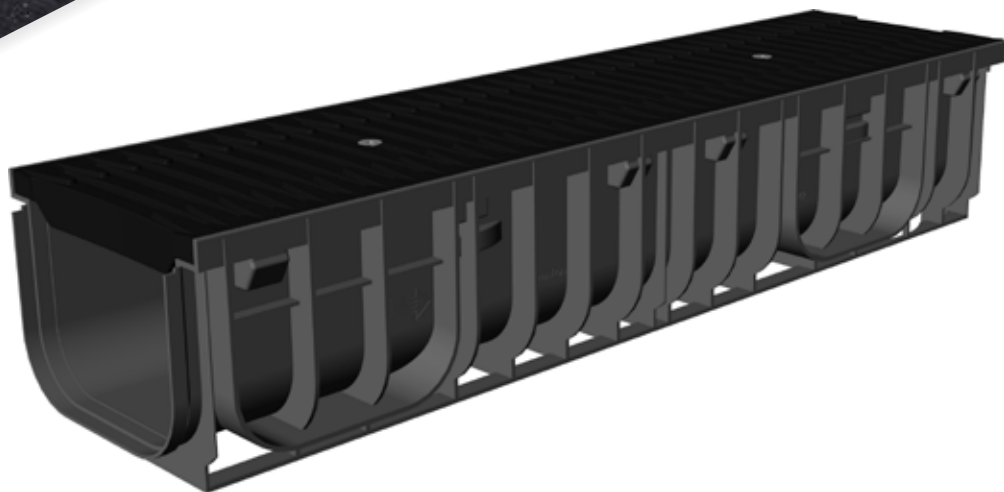


AVAILABLE GRATES

	Mesh grating	Black Fibretec	Longitudinal slot
Load class			
B 125	100	150, 200	
C 250		100, 150	150

RECYFIX® PRO



RECYFIX® PRO 100		Length	Int. width	Int. depth	Total area	Mass	Item number
B 125 	Channel with mesh grating, MW 30 x 10 mm, locked	1 m (3.28 ft)	100 mm (4 in)	102 mm (4.0 in)	1099 cm ² (170.3 in ²)	6.0 kg (12.4 lb)	HAU47034
C 250 	Channel with FIBRETEC design slotted grating, SW 9 mm, black, locked 	1 m (3.28 in)	100 mm (4 in)	102 mm (4.0 in)	372 cm ² (57.7 in ²)	4.6 kg (9.3 lb)	HAU47055
RECYFIX® PRO 150		Length	Int. width	Int. depth	Total area	Mass	Item number
B 125 	Channel with mesh grating, MW 30 x 10 mm, locked	1 m (3.28 in)	150 mm (6 in)	160 mm (6.3 in)	1490 cm ² (231.0 in ²)	8.6 kg (17.4 lb)	HAU47140
C 250 	Channel with longitudinal galvanized steel grating, SW 12 mm, galvanised, locked 	1 m (3.28 ft)	150 mm (6 in)	160 mm (6.3 in)	-	14.2 kg (2.6 lb)	HAU31110 + HAU47100
C 250 	Channel with FIBRETEC design slotted grating SW 9 mm, black, locked 	1 m (3.28 ft)	150 mm (6 in)	160 mm (6.3 in)	500 cm ² (77.5 in ²)	7.4 kg (14.9 lb)	HAU47111
RECYFIX® PRO 200		Length	Int. width	Int. depth	Total area	Mass	Item number
B 125 	Channel with mesh grating, MW 30 x 10 mm, locked	1 m (3.28 ft)	200 mm (8 in)	152 mm (6.0 in)	1912 cm ² (296.4 in ²)	11.0 kg (22.3 lb)	HAU47248
B 125 	Channel with FIBRETEC design slotted grating, SW 9 mm, black, locked 	1 m (3.28 ft)	200 mm (8 in)	152 mm (6.0 in)	656 cm ² (101.7 in ²)	8.3 kg (16.8 lb)	HAU47246

END CAPS

RECYFIX®PRO 100



Closed end cap

RECYFIX®PRO 150



Combined end cap, PP with outlet

RECYFIX®PRO 200



Combined end cap, PP with outlet

	Int. width	Int. depth	Mass	Item number
RECYFIX®PRO 100				
Closed end cap	160 mm (6.3 in)	124 mm (4.9 in)	-	HAU48681
RECYFIX®PRO 150				
Combined end cap, PP with outlet	210 mm (8.3 in)	218 mm (8.6 in)	0.1 kg (0.2 lb)	HAU40591
RECYFIX®PRO 200				
Combined end cap, PP with outlet	258 mm (10.2 in)	217 mm (8.5 in)	0.2 kg (0.4 lb)	HAU41387



RECYFIX[®] NC

Heavy-duty linear drainage system with high-capacity for commercial or industrial applications with heavy traffic up to load class D400.



RECYFIX® NC



Channel made of recycled polypropylene (PP) with integrated reinforced angles with bolted cast iron grates.
Allows linear drainage for heavy road loads.
Available with an interior width of 100 to 300 mm (4 to 12 in).

INTEGRATED ANGLE HOUSING

- Molded as integral part of the channel body (made of PP)
- PP (polypropylene) do not oxidize
- Compliant to EN 1433 standard

STANDARDIZED PRODUCT

- According to EN 1433
- CE marking

QUICK AND EASY INSTALLATION

- Delivered with assemble bolted grates
- Lightweight and unbreakable
- Easy to store

VERY STURDY

- Massive ductile iron grate, bolted
- Resistance to shearing, tearing of the grates

LARGE CHANNEL SECTION

- Drainage section up to 1293 cm² (200.4 in²)

HIGH-GRADE MATERIAL

- High resistance against frost, de-icing salt and UV-rays

LATEST GENERATION CHANNEL BODY

- 20 years of experience
- Monomaterial: recycled PP
- Environmentally neutral


- 1**
Channel in PP, compliant to EN 1433 standard, with integrated reinforced angles in PP.
- 2**
Slotted cast iron grate, D400 load class.
- 3**
End cap with or without outlet (optional).









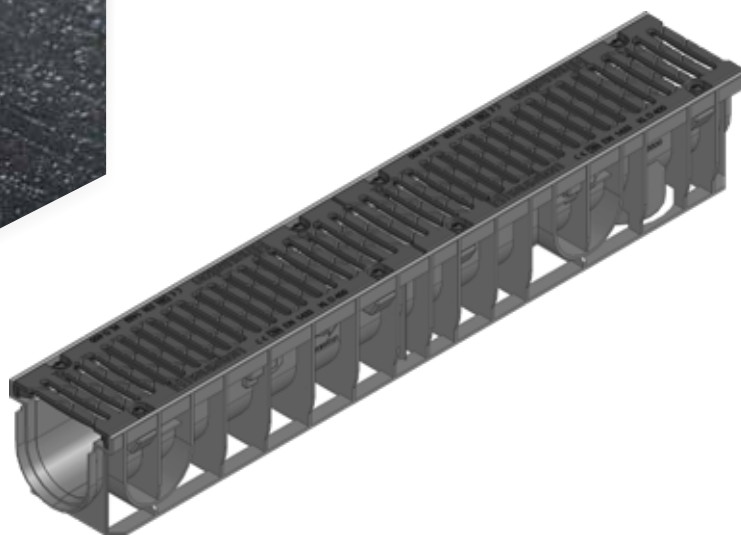

AVAILABLE GRATES

Slotted cast iron	
Load class D 400	100, 150, 200, 300

RECYFIX®NC



RECYFIX®NC 100		Length	Int. width	Int. depth	Total area	Mass	Item number
	Channel with cast iron grate, black, 10 mm openings, bolted	 1 m (3.28 ft)	100 mm (4 in)	102 mm (4.016 in)	427 cm ² (66.2 in ²)	10.7 kg (21.6 lb)	HAU48771
RECYFIX®NC 150		Length	Int. width	Int. depth	Total area	Mass	Item number
	Channel with cast iron grate, black, 18 mm openings, bolted	 1 m (3.28 ft)	150 mm (6 in)	160 mm (6.3 in)	702 cm ² (108.8 in ²)	15.7 kg (31.8 lb)	HAU48871
RECYFIX®NC 200		Length	Int. width	Int. depth	Total area	Mass	Item number
	Channel with cast iron grate, 18 mm openings, black, bolted	 1 m (3.28 ft)	200 mm (8 in)	152 mm (6.0 in)	936 cm ² (145.1 in ²)	20.8 kg (42.0 lb)	HAU49573
RECYFIX®NC 300		Length	Int. width	Int. depth	Total area	Mass	Item number
	Channel with cast iron grate, 18 mm openings, black, bolted	 1 m (3.28 ft)	300 mm (12 in)	300 mm (11.8 in)	1293 cm ² (200.4 in ²)	34.7 kg (70.2 lb)	HAU49873



RECYFIX[®] NC

ACCESSORIES

END CAPS

RECYFIX[®] NC 100



Closed end cap

RECYFIX[®] NC 150



Closed end cap combined made of PP / with outlet

RECYFIX[®] NC 200



Closed end cap combined made of PP / with outlet

RECYFIX[®] NC 300



Closed end cap, galvanised steel

	Int. width	Int. width	Mass	Item number
RECYFIX[®] NC 100				
Closed end cap	160 mm (6.3 in)	124 mm (4.9 in)	-	HAU48681
RECYFIX[®] NC 150				
Closed end cap combined made of PP / with outlet	210 mm (8.3 in)	218 mm (8.6 in)	0.1 kg (0.2 lb)	HAU40591
RECYFIX[®] NC 200				
Closed end cap combined made of PP / with outlet	258 mm (10.2 in)	217 mm (8.5 in)	0.2 kg (0.4 lb)	HAU41387
RECYFIX[®] NC 300				
Closed end cap, galvanised steel	360 mm (14.2 in)	360 mm (14.2 in)	1.9 kg (4.2 lb)	HAU49783
End cap with horizontal PVC-U pipe outlet, galvanised steel	360 mm (14.2 in)	360 mm (14.2 in)	2.60 kg (5.7 lb)	HAU49791



Proudly distributed by:



SOLENO
Mastering Storm Water

1160 route 133
Saint-Jean-sur-Richelieu (Qc)
Canada J2X 4B6

800.363.1471
soleno.com

