




SOLENO
Mastering Storm Water

4" CORRUGATED SINGLE WALL PIPE FOR WIRES

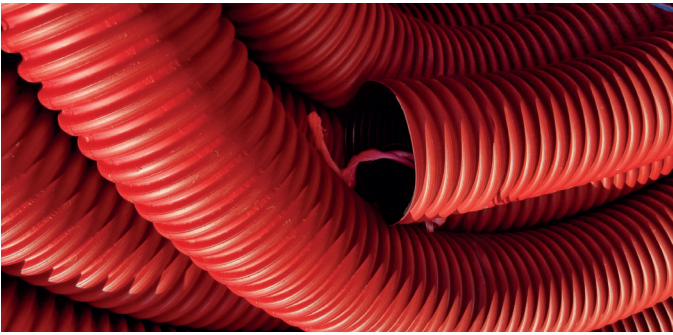

HDPE: INCREASE QUALITY, STRENGTH AND TOUGHNESS

- HDPE compound exceeds a cell classification of 323410C
- Meet or exceed ASTM F667 Standard
- Pipe Stiffness:> 320 kPa
- Weight/foot:>160gms
- Colour: 20% Red outer skin
80% Black inner wall

EASY TO INSTALL / TO USE

- The integrated standard pull string is a PP UV stabilized twine with a 440 lb knot strength. Mule Tape is available on special order and a minimum order length of 20,000'.

UV STABILITY

- A UV stabilizer package is added to the red coloured skin, and the underlying black layer has the standard 2% carbon black additive which is the accepted UV stabilizer for long-term sun exposure.

RECYCLED CONTENT

- The tubing is typically made with at least 50% recycled industrial plastics in the black inner layer. The outer skin is a virgin PE material with a red colourant additive.

PRODUCT ROLL SIZES

- Available in standard lengths of 100' and 250'. For longer runs a special order can be made in coil lengths up to 4600'.

STANDARD SHIPPING PACKS

- 100' Rolls shipped in bundles of 5-46" OD by 94" long
- 250' Rolls shipped in bundles of 4-60" OD by 94" long