

DATA SHEET

BEAVER BARRIER


PRODUCT DESCRIPTION : Rigid smooth interior wall and corrugated exterior wall, tee section with openings, downwards, attached to a length of Solflo Max.

FUNCTION : For conveying water towards an outlet in spite of beaver dams.


RAW MATERIALS : Pipe: Made from ASTM D3350 high-density polyethylene (HDPE)

Anchors : 13 mm (0.51 in) reinforcing steel bar, 1.6 m (5,3 pi) long, with anchoring hooks at both ends.

AVAILABLE COUPLERS : Bell with clips 300 mm (12 in) and 450 mm (18 in).

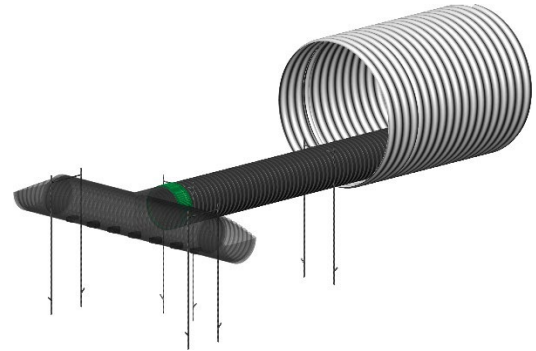

BEAVER BARRIER

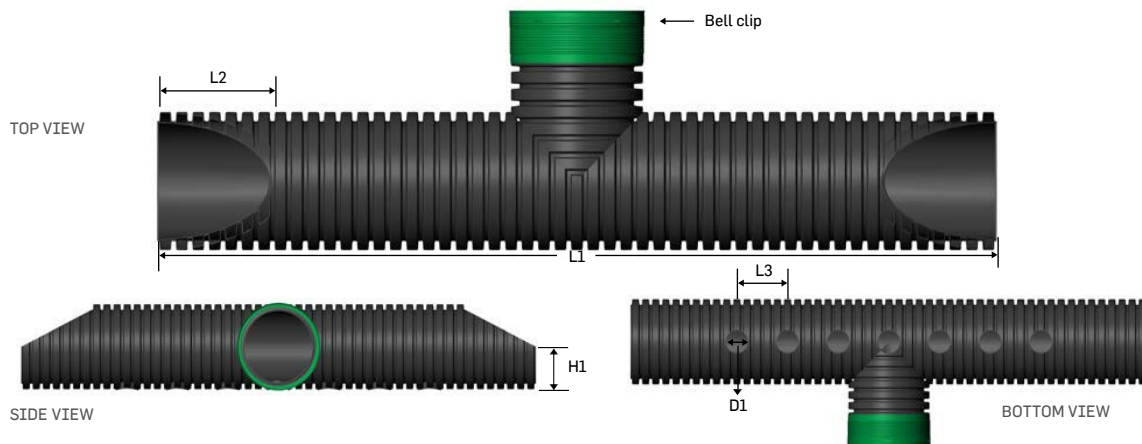

TECHNICAL DATA TABLE

Nominal dia.		Length (L1)		Length (L2)		Length (L3)		Diameter (D1)		Height (H1)		Openings
mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	
300	12	3450	135	450	17,7	339	13,3	150	6	76,2	3,0	7
450	18	3450	135	475	18,7	339	13,3	150	6	114,3	4,5	7

Note : Length of transverse pipe: 9 m (29.5 ft)