

DATA SHEET

WYE (Y)

PRODUCT DESCRIPTION: Factory-made wye (y)


FUNCTION: Splits a main line to two same-diameter lines

MANUFACTURING STANDARDS: *100 mm (4 in) to 900 mm (36 in) diameter pipes:*
Made from pipes that meet standards BNQ 3634-120 (R320). On special order, made from pipes that meet standards CSA B182.8, AASHTO M252 or AASTHO M294
1050 mm (42 po) to 1200 mm (48 po) diameter pipes:
Made from pipes that meet standards CSA B182.8 and AASHTO M294



RAW MATERIALS: Made of high density polyethylene (HDPE) ASTM D3350

AVAILABLE FITTINGS: Fits any Solflo Max fitting

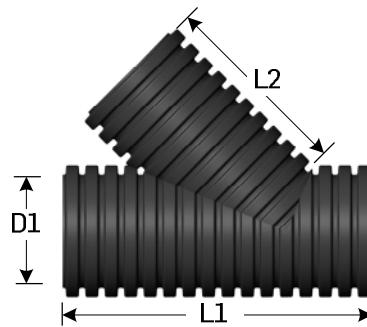

TECHNICAL DATA TABLE

Diameter D1		Length L1		Length L2		No connector	Soil tight connectors HDPE				Watertight connectors HDPE			
mm	in	mm	in	mm	in	PE	BC	DBS	DBC	SC	BIGC	BG	DBIG	DBIGC
100	4	330	12.99	201	7.91	X		X		X				X
150	6	456	17.95	281	11.06	X		X		X				X
200	8	584	22.99	361	14.21	X		X		X				X
250	10	765	30.12	474	18.66	X		X		X				X
300	12	851	33.50	608	23.94	X			X	X				X
375	15	1065	41.93	677	26.65	X	X			X	X			
450	18	1153	45.39	750	29.53	X	X			X	X			
525	21	1362	53.62	852	33.54	X	X			X	X			
600	24	1605	63.19	1018	40.08	X	X			X	X			
750	30	1901	74.84	1222	48.11	X	X			X	X			
900	36	2134	84.02	1434	56.46	X	X			X	X			

Note 1 : Dimensions shown above may vary slightly

Note 2 : For non-standard dimensions (1050 mm and 1200 mm (42 in and 48 in)), contact your Soleno representative.

LEGEND

PE: plain end
BC: bell with clips
DBS: double bell snap
DBC: double bell with clips

SC: split coupler
BIGC: bell with integrated gasket with clips
BG: O-ring bell gasket

DBIG: double bell with integrated gasket
DBIGC: double bell with integrated gasket with clips

DATA SHEET

WYE (Y) (CONT'D)

TECHNICAL DATA TABLE - CGPF WYE (Y)

Diameter D1		Length L1		Length L2		Watertight connectors HDPE
mm	in	mm	in	mm	in	DCGI-CGPF
100	4	330	12.99	135	5.31	X
150	6	456	17.98	202	7.95	X
200	8	584	22.99	259	10.20	X
250	10	765	30.12	474	18.66	X

Note 1 : Dimensions shown above may vary slightly

Note 2 : For non-standard dimensions, contact your Soleno representative.

LEGEND

DBIG: double bell with integrated gasket

CGPF : water tight PVC female